


PRODUCT INFORMATION

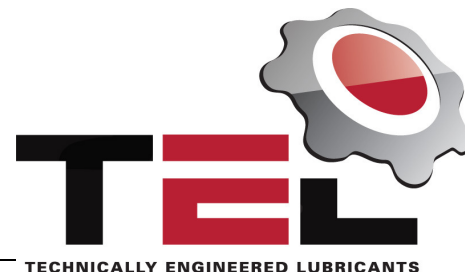

TEL HM 10W30

PREMIUM HIGH PERFORMANCE ENGINE OIL – ILSAC GF-5, API SN, SN-RC

Product Description

Extreme 10W30 is a high performance passenger car engine oil designed to meet the latest car manufacturers warranty requirements. Specifically formulated to meet the demands of the small displacement high RPM fuel efficient engines found in today's domestic and foreign automobiles.

The oil is a blend of the premium base oils and special additives which protects against high temperature oxidation, wear, and viscosity breakdown. It is fortified with detergent-dispersants, rust, corrosion inhibitors and friction modifiers to keep engines exceptionally clean and free of sludge, varnish rust and meet the fuel economy requirements.

It meets the performance of ILSAC GF-5, API SN & SN-Resource Conserving.

Advantages & Uses

- **Extreme 10W30** exceeds **ILSAC GF-5** and **API** Service Classification of **SN** and **SN-RC** requirements and is recommended for domestic and foreign high performance engines. It is recommended for small, high RPM engines including those that are turbo-charged.
- Recommended for passenger cars, light duty pickups, motorcycles and other gasoline engines in mobile and stationary service.
- Appropriate viscosity grades meets the warranty requirements of the Chrysler (**MS 6395S**), Ford and General Motors specifications.

Features

- Extreme 10W30 meets and exceeds OEMs warranty requirements.
- Highly oxidation stable - protects engine from oil thickening, high temperature sludge and varnish deposits.
- Shear stable viscosity index improver-protects against viscosity breakdown in severe service.
- Effective detergent-dispersants keeps engine parts clean.
- Improved fuel economy means better gasoline mileage.
- High TBN / alkaline reserve effectively neutralizes corrosive acids formed by combustion to protect critical turbo charger bearings and other vital engine surfaces.
- Anti-wear agents effectively protect cam lobes and other highly loaded parts from wear.

Test, SAE	ASTM	10W30
Gravity, °API	D-287	32.5
Flash Point, °C.	D-92	220
Pour Point, °C.	D-97	- 30
Viscosity @ 100°C, cSt	D-445	11.0
Viscosity @ - 25°C. CCS	D5293	5,400
Viscosity Index	D-2270	150
Appearance	Visual	Bright & Clear
Color	D-1500	3.0
Zinc, Wt. %		0.085
Phos, Wt %		0.077
TBN	D-2896	7.9

VALUES SHOWN HERE ARE TYPICAL AND MAY VARY